


## AQUA + HB – Reverse Osmosis Unit

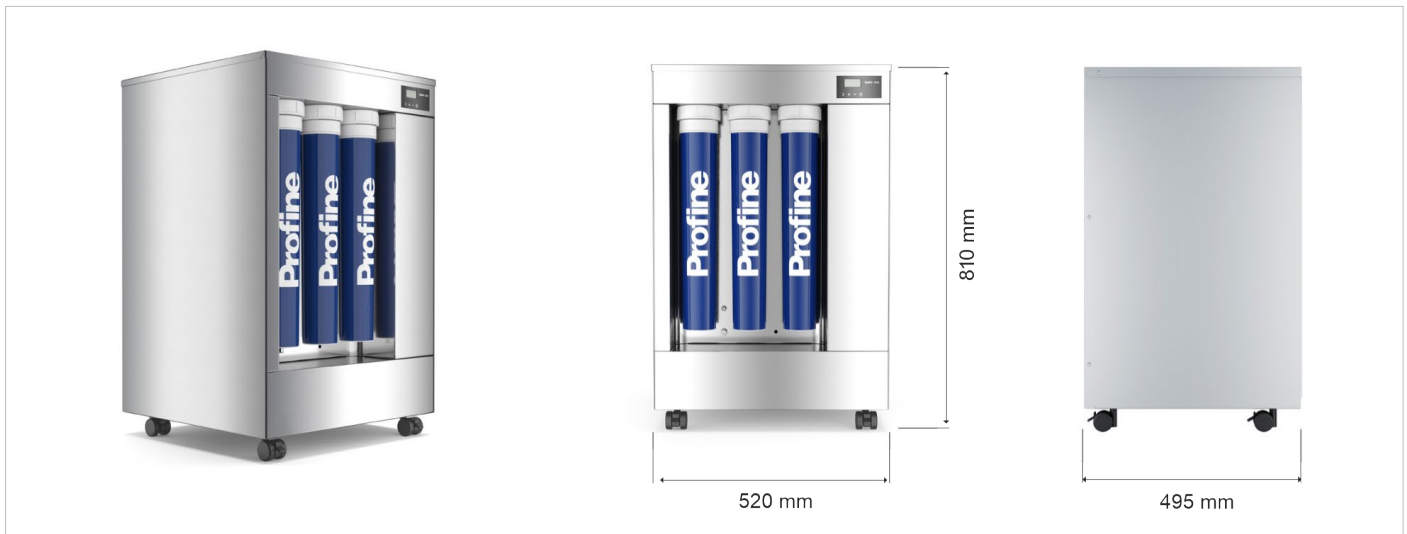

### Brief Description

Reverse Osmosis Water Purifier. Compact in size, powerfully efficient, the unit offers trouble-free maintenance. The unit easily integrates with washing systems with straightforward water and electrical hook-ups. To combine with Comenda machines fitted with a Rinse Control Device (RCD).

### Technical Features

Length x Depth x Height .....	520x495x810 mm
Weight .....	50 kg
Approved Decibel Level .....	<70 dB(A)
Membrane .....	7
Active Carbon Filter .....	Profine® BLUE large
Filter Life.....	150000 l
Protection.....	IP20
Water Type.....	Potable
Minimum Water Temperature .....	5°C
Maximum Water Temperature .....	35°C
Minimum Inlet Flow Rate .....	1200 l/h
Maximum Inlet Pressure .....	600 kPa
Minimum Inlet Pressure.....	150 kPa
Maximum Relative Humidity .....	90%
Minimum External Temperature .....	5°C
Maximum External Temperature .....	40°C
Power Supply Type .....	SINGLE PHASE + GROUND
Voltage .....	230 V
Frequency .....	50/60 Hz
Absorbed Current .....	4 A
Power .....	550 W
Flow Rate a 15°C .....	420 l/h
Recovery .....	25-60%
Typical Rejection .....	95%
By-pass .....	-